




# LR6-72PH 350~380M



**Hi-MO1 High Efficiency  
Low LID Mono PERC Technology  
(1500V Compatible)**

10-year Warranty for Materials and Processing;  
25-year Warranty for Extra Linear Power Output

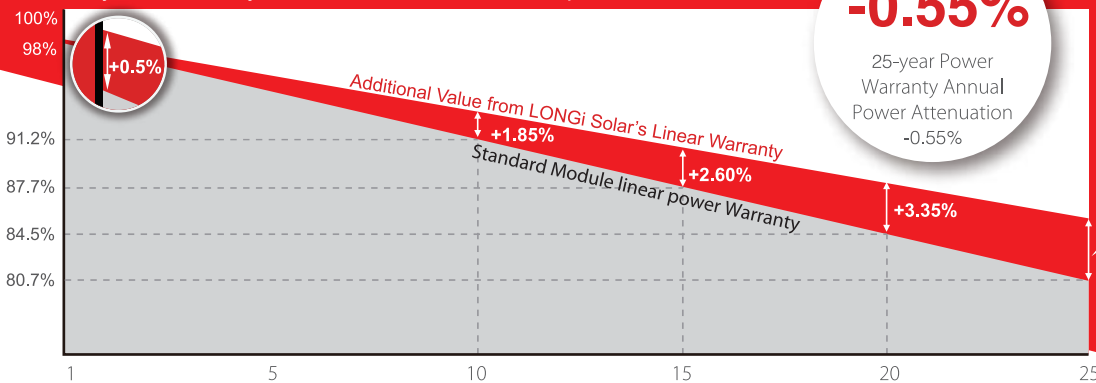

### Complete System and Product Certifications

IEC 61215, IEC61730, UL1703  
ISO 9001:2008: ISO Quality Management System  
ISO 14001: 2004: ISO Environment Management System  
TS62941: Guideline for module design qualification and type approval  
OHSAS 18001: 2007 Occupational Health and Safety



\* Specifications subject to technical changes and tests. LONGi Solar reserves the right of interpretation.

**Positive power tolerance** (0 ~ +5W) guaranteed

**High module conversion efficiency** (up to 19.6%)

**Slower power degradation** enabled by Low LID Mono PERC technology: first year <2%, 0.55% year 2-25

**Better energy yield** with excellent low irradiance performance and temperature coefficient

**Solid PID resistance** ensured by solar cell process optimization and careful module BOM selection

**Adaptable to harsh environment:** passed rigorous salt mist and ammonia tests


# LONGi Solar

Room 201, Building 8, Sandhill Plaza, Lane 2290, Zuchongzhi Road, Pudong District, Shanghai, 201203  
Tel: + 86-21-61047332 Fax: +86-21-61047377 E-mail: module@longi-silicon.com  
Facebook: www.facebook.com/LONGi Solar

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.

# LR6-72PH 350~380M

## Design (mm)

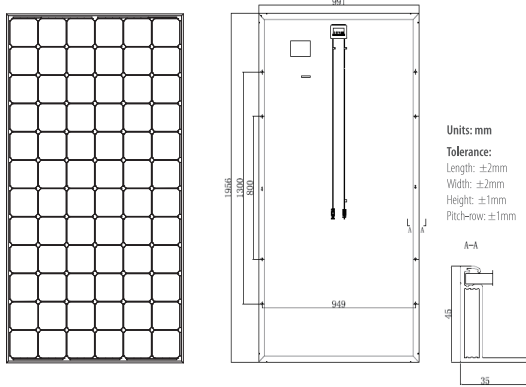

## Mechanical Parameters

Cell Orientation: 72 (6×12)  
 Junction Box: IP67, three diodes  
 Output Cable: 4mm<sup>2</sup>, 1200mm in length  
 Connector: MC4 EVO2  
 Weight: 26.5kg  
 Dimension: 1956×991×45mm  
 Packaging: 23pcs per pallet

## Operating Parameters

Operational Temperature: -40 C ~ +85 C  
 Power Output Tolerance: 0 ~ +5 W  
 Maximum System Voltage: DC1500V (IEC)  
 Maximum Series Fuse Rating: 20A  
 Nominal Operating Cell Temperature: 45±2 C  
 Application Class: Class A

## Electrical Characteristics

Test uncertainty for Pmax: ±3%

Model Number	LR6-72PH-350M		LR6-72PH-355M		LR6-72PH-360M		LR6-72PH-365M		LR6-72PH-370M		LR6-72PH-375M		LR6-72PH-380M	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	350	257.3	355	260.9	360	264.6	365	268.3	370	272.0	375	275.6	380	279.3
Open Circuit Voltage (Voc/V)	47.5	43.9	47.7	44.1	47.9	44.3	48.0	44.4	48.3	44.7	48.5	44.9	48.7	45.0
Short Circuit Current (Isc/A)	9.57	7.71	9.63	7.76	9.70	7.82	9.74	7.85	9.84	7.93	9.90	7.98	9.99	8.05
Voltage at Maximum Power (Vmp/V)	38.8	35.6	39.0	35.9	39.2	36.0	39.3	36.1	39.4	36.2	39.6	36.4	39.8	36.6
Current at Maximum Power (Imp/A)	9.03	7.22	9.10	7.28	9.18	7.34	9.29	7.43	9.39	7.51	9.47	7.58	9.55	7.64
Module Efficiency(%)	18.1		18.3		18.6		18.8		19.1		19.3		19.6	

STC (Standard Testing Conditions): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25 C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20 C, Spectra at AM1.5, Wind at 1m/S

## Temperature Ratings ( STC )


Temperature Coefficient of Isc: +0.057%/C  
 Temperature Coefficient of Voc: -0.286%/C  
 Temperature Coefficient of Pmax: -0.380%/C

## Mechanical Loading


Front Side Maximum Static Loading: 5400Pa  
 Rear Side Maximum Static Loading: 2400Pa  
 Hailstone Test: 25mm Hailstone at the speed of 23m/s

## I-V Curve


Current-Voltage Curve (LR6-72PH-360M)

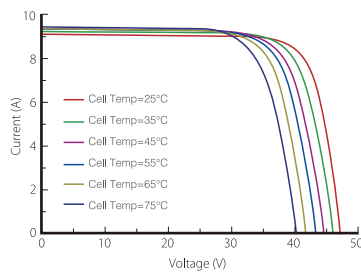

Power-Voltage Curve (LR6-72PH-360M)

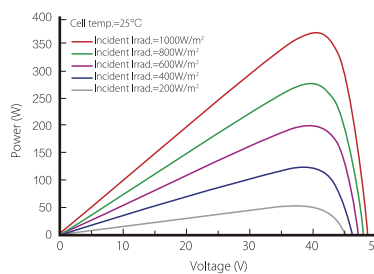

Current-Voltage Curve (LR6-72PH-360M)

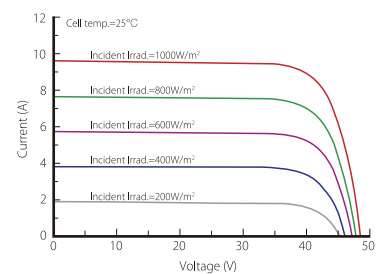

**LONGi Solar**

Room 201, Building 8, Sandhill Plaza, Lane 2290, Zuchongzhi Road, Pudong District, Shanghai, 201203  
 Tel: + 86-21-61047332 Fax: +86-21-61047377 E-mail: module@longi-silicon.com  
 Facebook: www.facebook.com/LONGi Solar

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.