



ALLSAI[®]

Innovating Power




LP SERIES-GENERAL

LP-12-100 (12V100Ah)

LP SERIES-GENERAL / LP-12-100 (12V100AH)

CHARACTERISTICS

Item	Specifications	
Rated Voltage	12V	
Nominal Capacity (25 °C)	$C_{20}, 1.75V/\text{cell}$	100Ah
Dimension	Length	330mm (13.0inches)
	Width	173mm (6.81inches)
	Container Height	213mm (8.39inches)
	Total Height	220mm (8.66inches)
Approx Weight	28.5kg 62.8lbs)	
Terminal	T11(M8)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	2000A	
Internal Resistance (25 °C)	Approx 4.9 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-15~50 °C (5~122°F)
	Charge	-20~40 °C (-4~104°F)
	Storage	-15~40 °C (5~104 °F)
Nominal Operating Temp. Range	25 ±3 °C (77 ±5°F)	
Max.Charging Current (25 °C)	0.3C	
Charge voltage (25 °C)	Standby Use	Cycle Use
	2.25-2.30V/cell	2.35-2.45V/cell
Temp . Coefficient	-3mV/cell/ °C	
	-5mV/cell/ °C	
E ffect of temp. to Capacity	40 °C (104 °F)	103%
	25 °C (77°F)	100%
	0 °C (32 °F)	86%
Self Discharge	≤3% per month at 25°C (77°F). LP series batteries may be stored up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter .	

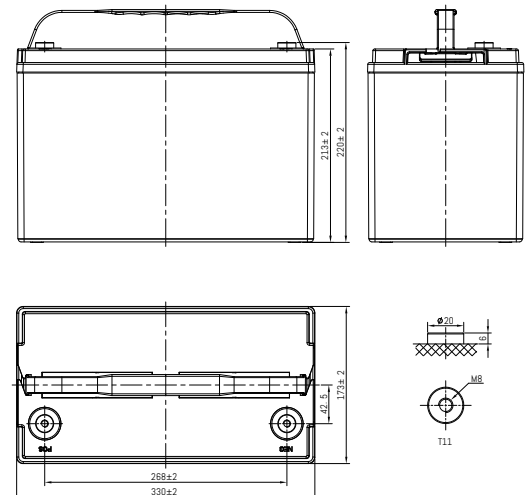

DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)																
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	149.8	106.5	96.2	75.7	67.6	49.5	41.9	30.4	25.5	18.7	14.7	12.8	11.2	8.64	7.16	3.80
1.80V/cell	170.4	120.9	109.0	85.5	73.6	52.4	43.4	31.4	26.4	20.3	15.7	13.4	12.1	9.09	7.50	3.94
1.75V/cell	185.1	131.1	118.0	92.3	75.2	54.3	45.5	33.0	27.8	20.7	16.0	13.7	12.2	9.14	7.58	3.98
1.70V/cell	197.8	139.8	125.3	97.9	76.7	55.4	46.5	33.7	28.3	21.1	16.3	13.9	12.2	9.28	7.65	4.02
1.67V/cell	204.7	144.2	129.0	100.6	77.8	56.2	47.1	34.2	28.7	21.3	16.5	14.2	12.3	9.41	7.75	4.07
1.60V/cell	212.0	149.2	133.0	103.2	78.9	57.0	47.8	34.7	29.1	21.5	16.7	14.4	12.4	9.53	7.84	4.11

Constant Power Discharge (Watts/cell) at 25°C (77°F)																
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	279.8	200.4	182.1	143.9	129.3	93.2	81.0	58.9	49.7	36.6	28.8	25.1	21.8	17.2	14.2	7.57
1.80V/cell	313.0	224.2	203.8	161.0	139.6	98.1	83.5	60.6	51.0	39.5	30.7	26.3	23.3	18.0	14.9	7.83
1.75V/cell	334.0	239.2	217.5	171.8	141.4	101.0	87.2	63.4	53.5	40.2	31.1	26.7	23.4	18.0	15.0	7.90
1.70V/cell	351.1	251.5	228.6	180.6	143.0	102.4	88.5	64.4	54.3	40.8	31.5	27.0	23.5	18.3	15.2	7.97
1.67V/cell	356.9	255.6	232.3	183.5	144.0	103.3	89.3	65.0	54.9	41.0	31.9	27.5	23.5	18.5	15.3	8.06
1.60V/cell	361.9	259.2	235.6	186.1	144.6	103.8	89.9	65.5	55.4	41.2	32.2	27.8	23.6	18.7	15.5	8.14

LP SERIES-GENERAL / LP-12-100 (12V100AH)

APPLICATIONS

- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system


GENERAL FEATURES

- 5 years design life (25°C)
- Lead calcium alloy, sealed design, no watering required
- Puncture resistant micro-porous glass mat separators extend life
- Unique technology optimizes power capacity, cell consistency, and long-term reliability
- Designed for a wide range of applications


STANDARDS

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Approved
- Manufactured in Leoch® IATF 16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

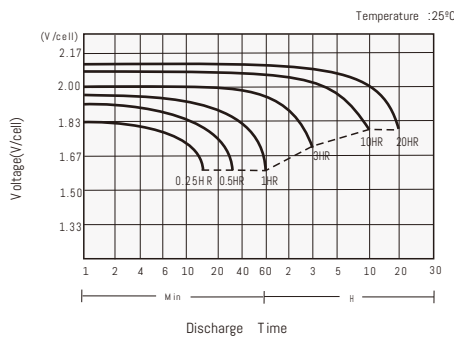


Charging Characteristics

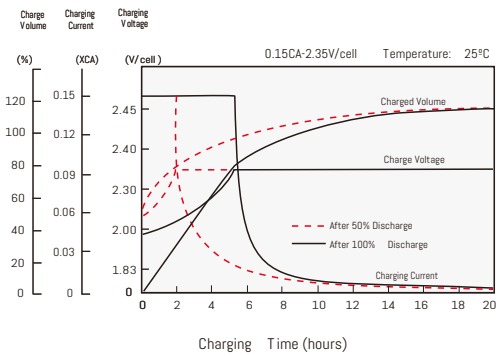

Effects of Temperature on Capacity

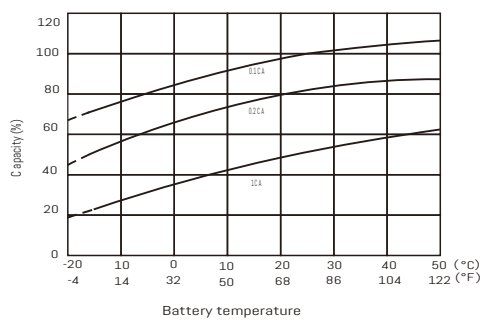

Self Discharge Characteristics

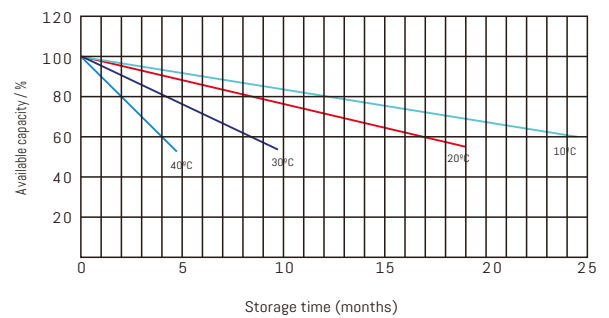



LP SERIES-GENERAL

www.allsai.com / comercial@allsai.com

ACERCA DE ALLSAI

ALLSAI es una compañía con más de 15 años de experiencia en el mercado latinoamericano destacándose por innovar continuamente en las diferentes soluciones de respaldo de energía.

Actualmente contamos con un amplio portafolio de soluciones que agrega valor al negocio de nuestros clientes, logrando posicionar nuestra marca en toda la región con un sello de calidad y respaldo que hace la diferencia.



Lorem ipsum